


## INTERIOR LAMPS

### Interior Strip Lights (Dual Voltage)

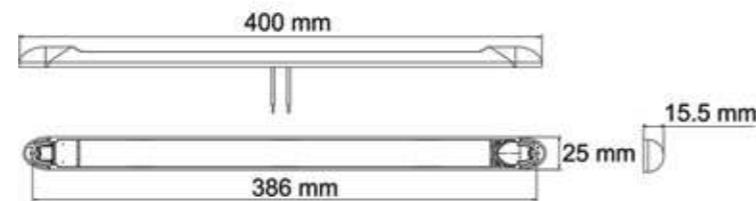


**Specifications:**

- Integral on/off switch for maximum versatility
- Water, dust and shock resistant
- Operating temperature: -30 to +50 °C
- Wiring: 100mm fly lead
- EMC approved (ECE R10)
- 5 year warranty.

Part No	Voltage	Current Consumption	Lumen	Number of LEDs	Candela
22776CKS-WV	12/24V	0.5A/0.2A	520	18	130

### Interior Strip Lights (Fixed Voltage)

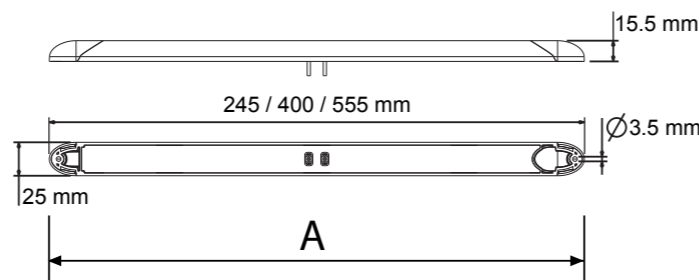

**Specifications:**

- Integral on/off switch for maximum versatility
- Water, dust and shock resistant
- Operating temperature: -30 to +50 °C
- Wiring: 100mm fly lead
- EMC approved (ECE R10)
- 5 year warranty.

Part No	Voltage	Length A	Current Consumption	Lumen	Number of LEDs	Candela
22761S-12V	12V	245 mm	0.2A	110	9	140
22761S-24V	24V	245 mm	0.2A	110	9	140
22757S-12V	12V	400 mm	0.4A	220	18	280
22757S-24V	24V	400 mm	0.39A	220	18	280
22762S-12V	12V	555 mm	0.6A	330	27	420
22762S-24V	24V	555 mm	0.59A	330	27	420

## LED WORK LAMPS



22806



22807



22817



22808



22809

Part No.	Voltage	Type	Qty	SMD High Power LEDs			Current Draw	Connector	Weight
				Watt	Lumen	HV CD			
22806	12-36V	Spot	9	20	1800	4600	1.5A (13.5V) / 0.73A (28V)	280mm cable	820 g
22807	12-36V	Flood	9	20	1800	3600	1.5A (13.5V) / 0.73A (28V)	280mm cable	805 g
22808	12-36V	Flood	8	19	1600	3050	1.38A (13.5V) / 0.65A (28V)	280mm cable	620 g
22809	12-36V	Flood	6	18	1200	2210	1.5A (13.5V) / 0.65A (28V)	280mm cable	518 g
22817	12-36V	Flood	3	9	600	892	0.7A (13.5V) / 0.33A (28V)	280mm cable	173 g

Material				Resistant				
Lens	Housing	Bracket	Hardware	Water	Dust	Shock	IP Rating	Temperature
PC	Aluminium	Stainless	Steel	•	•	•	IP67	-30°C - +50°C