


FEATURES


- High Resolution 7" Digital TFT LCD
- Free Input voltage (DC 10V ~ 30V)
- LED Backlight technology (400cd/m2)
- Various display modes: Full, Split, Triple, Quad, PIP
- Capacitive Touch Control
- Motorized Shutter-camera & heater support
- 4 Camera Inputs (4-pin mini DIN)
- 1 AV Output (RCA)
- 4 Trigger Inputs
- Anti Reflection Window
- Automatic Brightness Control (Day/Night)
- Auto Scan function
- Auto Power function
- NTSC/PAL compatible
- Multi-lingual OSD control
- Built-in Speaker
- Electronic Distance Marker (Parking lines type A + B)
- Bracket rails and Heavy Duty mounting possibility
- Speedswitch function via tacho signal (e.g. frontview)
- CE marked
- EMC approved




< SPLIT MODE >

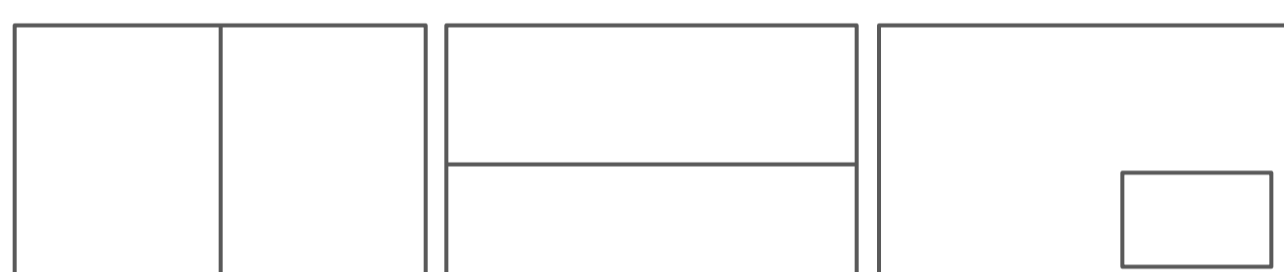

< TRIPLE MODE >

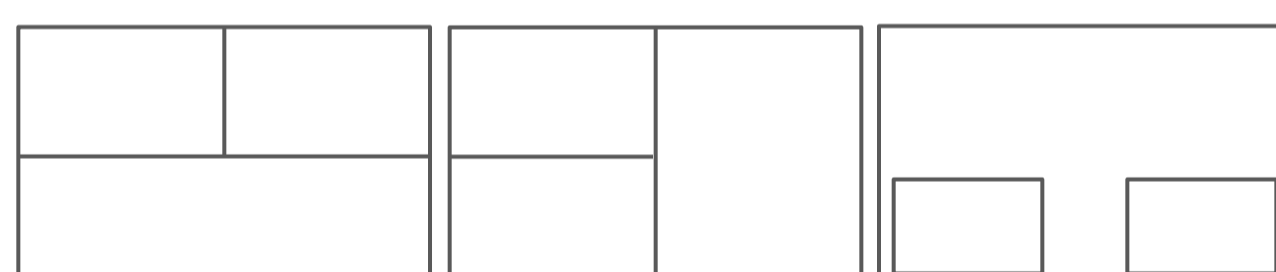

< QUAD MODE >

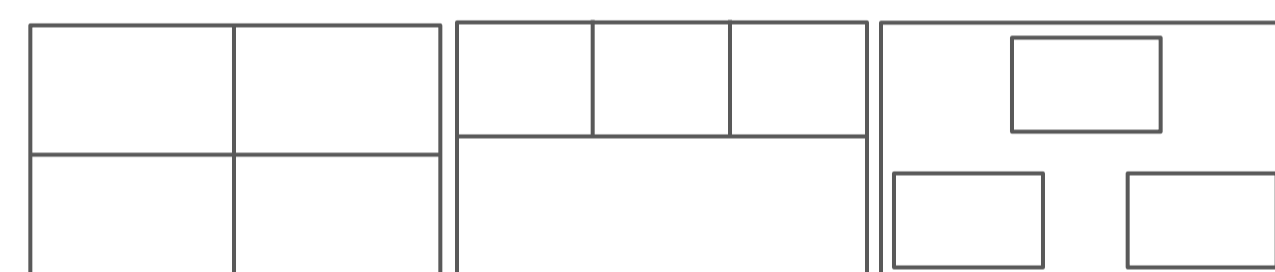

Specifications

Power input	10V~30V DC (Power consumption: Max. 18W)
Video System	NTSC / PAL signal compatible
Panel	7" Digital
Resolution	800 RGB(H) X RGB X 480(V)
Format	16:9 wide
Brightness	400cd/m2
Contrast Ratio	500:1
Display Mode	Single, Split, Triple, Quad, PIP
Speaker	8 ohm/0.3Watt
Viewing Angle	Top: 50°, Bottom: 70°, Left: 70°, Right: 70°
Operating Temperature	-35°C ~ 80°C
Dimensions	195(W) X 109(D) X 22(H) mm
Weight	Approx. 410g
Accessories	<ul style="list-style-type: none"> - Bracket (Rail Type) - Sunvisor - Screw kit - Instruction manual <p style="text-align: right;">Optional: Window bracket MXN-BR007</p>

